

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan


“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 14867 (2000): Cartridges, Type A, for Indexable Inserts
- Dimensions [PGD 32: Cutting tools]

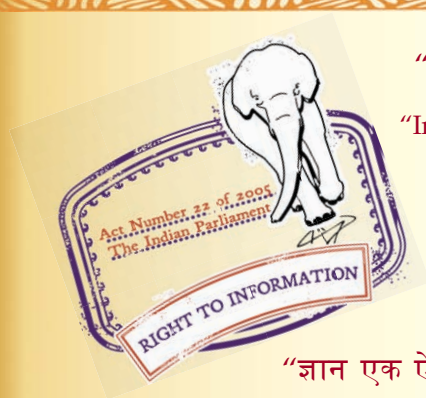

“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



भारतीय मानक

कार्टिज, टाइप ए, बदले जा सकने वाले
इंसर्टों के लिए — आयाम

Indian Standard

CARTRIDGES, TYPE A, FOR
INDEXABLE INSERTS — DIMENSIONS

ICS 25.100.01

© BIS 2000

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

NATIONAL FOREWORD

This Indian Standard which is identical with ISO 5611:1995 'Cartridges, type A, for indexable inserts — Dimensions' issued by the International Organization for Standardization (ISO) was adopted by the Bureau of Indian Standards on the recommendations of the Single Point Cutting Tools, Carbide Tips and Indexable Inserts Sectional Committee and approval of the Basic and Production Engineering Division Council.

The text of the ISO standard has been approved as suitable for publication as Indian Standard without deviations. Certain conventions are, however, not identical to those used in Indian Standards. Attention is particularly drawn to the following:

- a) Comma (,) has been used as a decimal marker in the International Standard while in Indian Standards, the current practice is to use a point (.) as the decimal marker.
- b) Wherever the words 'International Standard' appear referring to this standard, they should be read as 'Indian Standard'.

In the adopted standard, reference appears to the following International Standard for which Indian Standard also exists. The corresponding Indian Standard which is to be substituted in its place is listed below along with its degree of equivalence:

<i>International Standard</i>	<i>Corresponding Indian Standard</i>	<i>Degree of Equivalence</i>
ISO 3002-1:1982 Basic quantities in cutting and grinding — Part 1: Geometry of the active part of cutting tools — General terms, reference systems, tool and working angles, chip breakers	IS 15522 (Part 1):1998 Basic quantities in cutting and grinding : Part 1 Geometry of the active part of cutting tools — General terms, reference systems, tool and working angles, chip breakers	Identical

Indian Standard

**CARTRIDGES, TYPE A, FOR
INDEXABLE INSERTS — DIMENSIONS**

1 Scope

This International Standard specifies the general dimensions of type A cartridges for indexable inserts, and specifies preferred cartridges (see clauses 5 and 6).

2 Normative reference

The following standard contains provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the edition indicated was valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the standard indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 3002-1:1982, *Basic quantities in cutting and grinding — Part 1: Geometry of the active part of cutting tools — General terms, reference systems, tool and working angles, chip breakers.*

3 Remarks


The designation of cartridges is dealt with in ISO 5608; however, for cartridges, type A, the symbol CA shall be applied in reference (7) of the code of symbolization, and for cartridges with lengths in accordance with this International Standard, the letter symbol identifying tool length is replaced by a dash.

4 Dimensions


4.1 Shank

The dimensions, in millimetres, given in figure 1 and table 1 apply to shanks of all cartridges styles:


- for cartridges having $h_1 = 6^{1)}, 8^{2)}, 10$ and 12

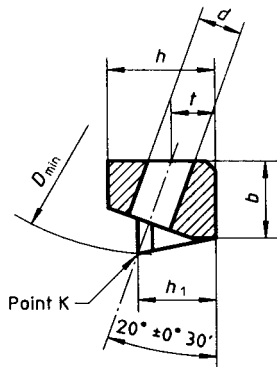


- for cartridges having $h_1 = 6^{1)}, 8^{2)}, 10, 12, 16$ and 20

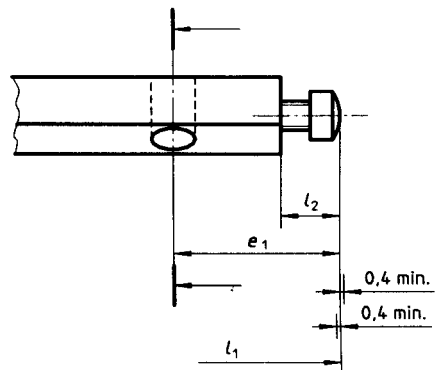

- for cartridges having $h_1 = 16, 20$ and 25

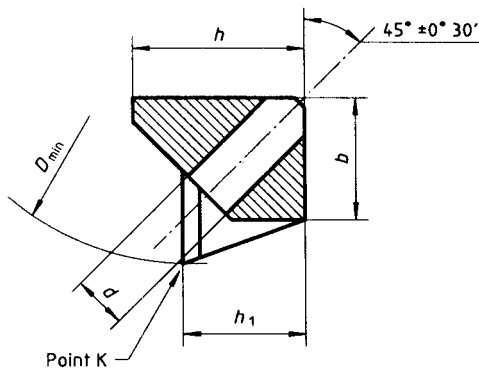

- for cartridges having $h_1 = 25$

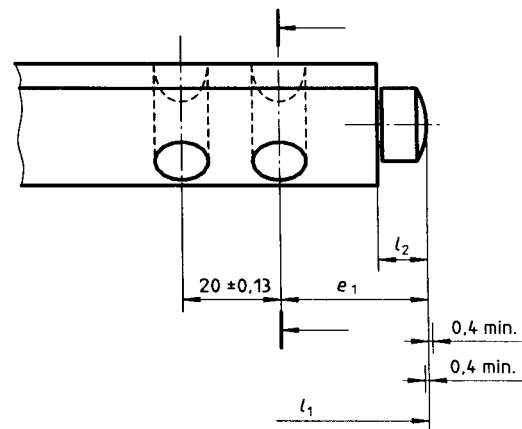

1) Cartridges designed mainly for indexable inserts in accordance with ISO 6987-2.
2) Cartridges designed mainly for indexable inserts in accordance with ISO 6987-1.

Figure 1

Table 1

h_1 $\pm 0,08$	h max.	b max.	e_1	l_2	t $\pm 0,13$	d	Fastening screw
6	8,5	6	12	4,5	3,5	4 $^{+0,5}_0$	M3,5
8	11	8	17	6	4,5	4,5	M4
10	15	11	20	8	5	7	M6
12	20	16	20	8	6	7	M6
16	25	20	25	8	0	9	M8
20	30	20	30	10	0	9	M8
25	35	25	30	10	0	11	M10

4.2 Identification of dimensions l_1 , f and h_1

4.2.1 The length dimension l_1 is the distance from the specified point K (see figures 2 to 5) to the end of the shank, including the adjusting screw length l_2 in its mid position.

Dimension f is the distance between the specified point K and the rear backing surface of the cartridge.

Dimension h_1 is the height to the specified point K.

The values of l_1 , f and h_1 , as specified in clause 6, are given for cartridges equipped with master inserts having corner radii in accordance with 4.2.3.

4.2.2 The specified point K is defined as follows:

Consider plane P_f (assumed working plane) and P_s (tool cutting edge plane) according to ISO 3002-1 for a selected point on the major cutting edge (for example point of tangency of major cutting edge with inscribed circle).

- For $\kappa_r \leq 90^\circ$, point K is defined as the intersection of plane P_s , a plane parallel to plane P_f tangent to the corner radius and a plane containing the tool face A_y (see figures 2 and 3).
- For $\kappa_r > 90^\circ$, point K is defined as the intersection of a plane parallel to plane P_f tangent to the corner radius, a plane perpendicular to plane P_f tangent to the corner radius and a plane containing the tool face A_y (see figures 4 and 5).

4.2.3 The corner radius r_c of the master inserts used for the definition of dimensions l_1 , f and h_1 is a function of the diameter of the inscribed circle of the insert, as indicated in table 2.

NOTE 1 Dimensions l_1 , f and h_1 are based on corner radii r_c converted from inch values, i.e. $r_c = 0,397$ mm, $0,794$ mm and $1,191$ mm.

Table 2

Dimensions in millimetres

Diameter of the inscribed circle	4,76	5,56	6,35	7,94	9,525	12,7	15,875	19,05
Corner radius r_c (nominal)	0,4				0,8		1,2	

4.2.4 Cartridges may be equipped with inserts of size in accordance with clause 6 and any corner radius r_c .

For corner radii r_c other than those specified in 4.2.3, dimensions l_1 and f shall be corrected by using the values x and y (see figures 2 to 5), which are the distances from the specified point K, as defined in 4.2.2, to the theoretical corner T.

The new dimensions l_1 and f are found from the differences between x and y corresponding to the corner radius according to 4.2.3, and x and y corresponding to the real corner radius.

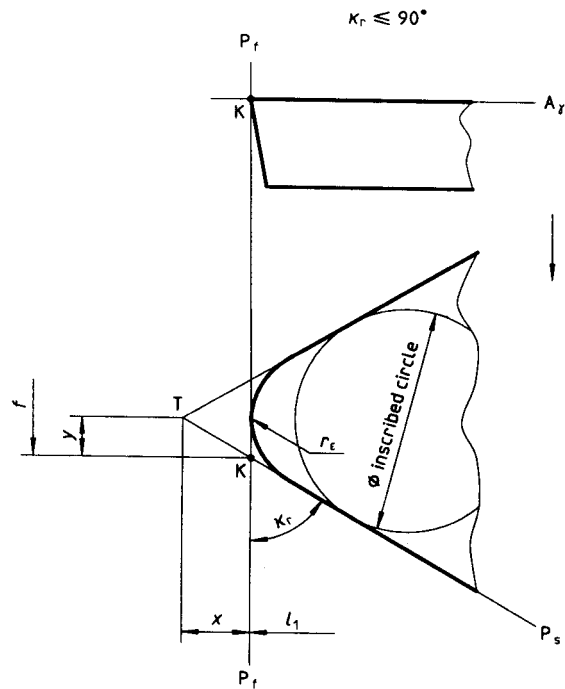


Figure 2

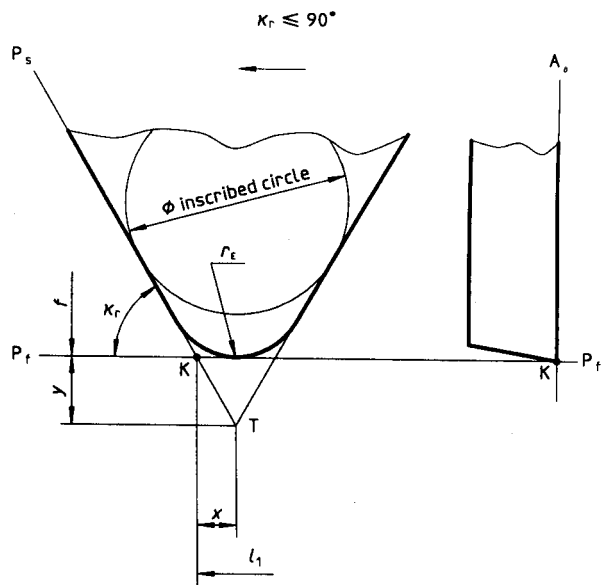


Figure 3

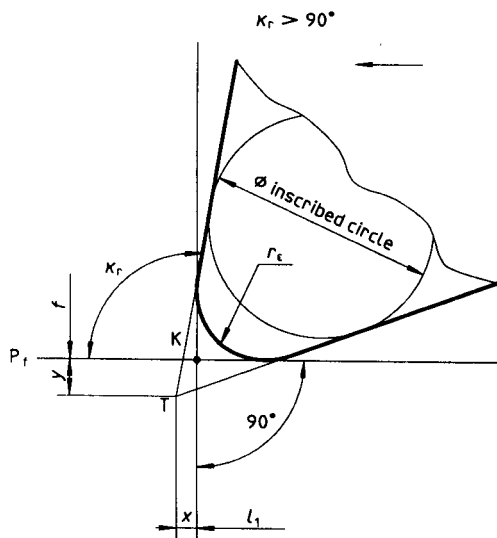


Figure 4

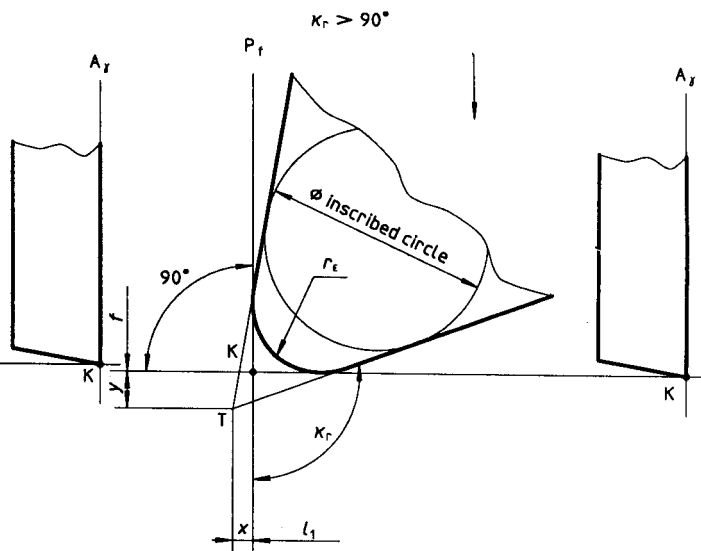


Figure 5

5 Preferred cartridge styles

5.1 Cartridge styles established by this International Standard are the styles shown in figures 6 to 17. In these figures, right-hand cartridges are shown; left-hand cartridges are symmetrical in their layout.

5.2 The length adjusting screw, as well as the transverse adjusting screw, are at the manufacturer's option; however, dimensions f and l_1 specified in clause 6 shall be respected.

5.3 Cartridges are classified into four families in respect of the working major direction and the corner defined. This allows interchangeability of cartridges within a family.

Family 1

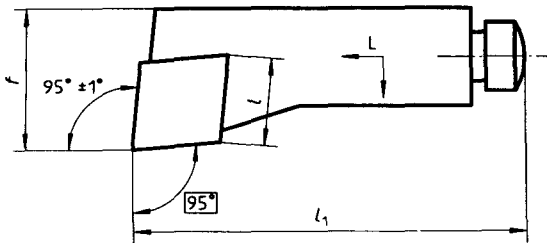


Figure 6

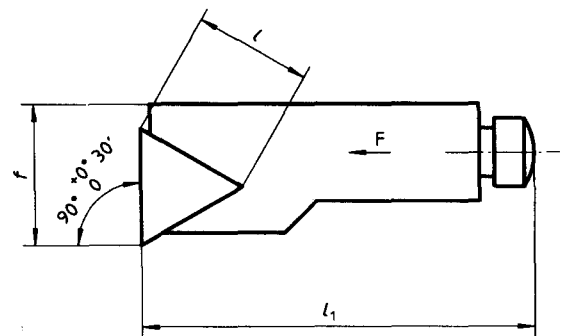


Figure 7

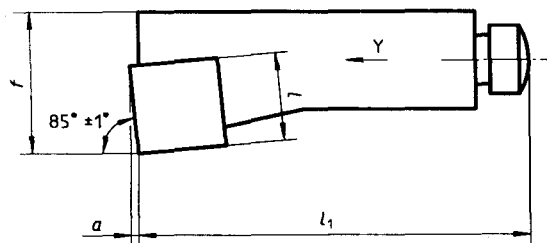


Figure 8

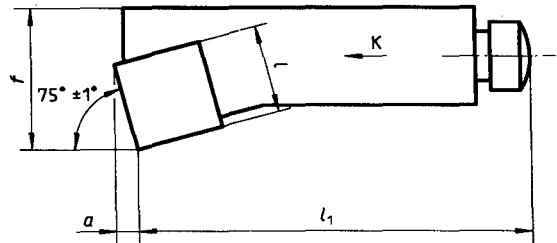


Figure 9

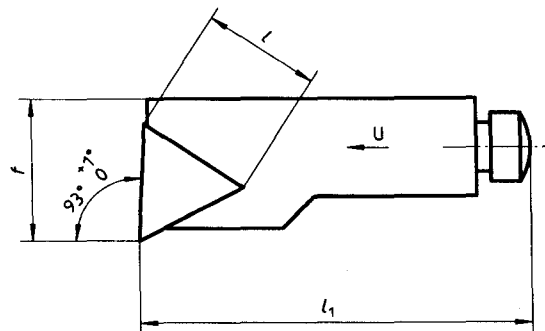


Figure 10

Family 2

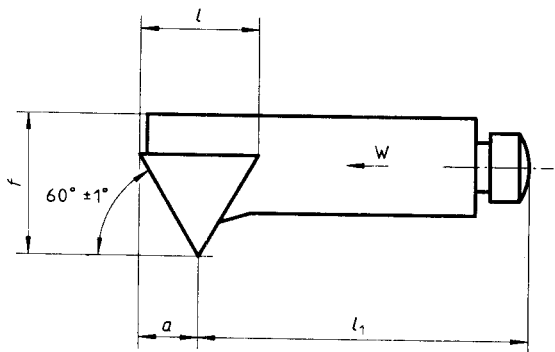


Figure 11

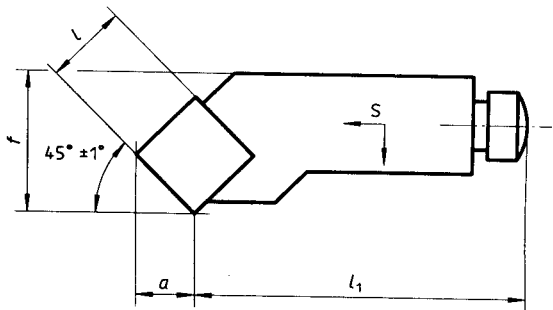


Figure 12

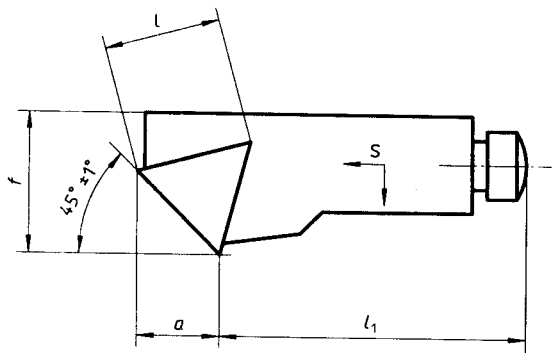


Figure 13

Family 3

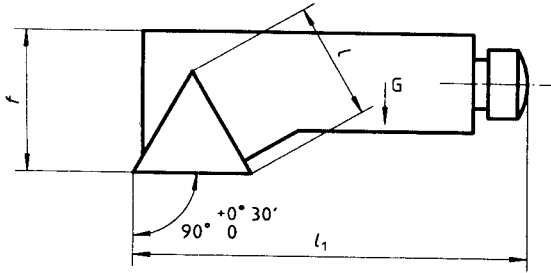


Figure 14

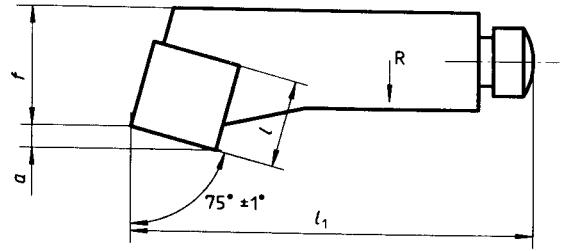


Figure 15

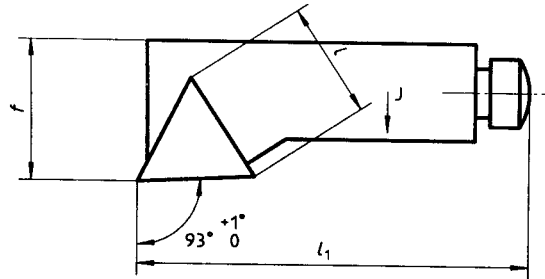


Figure 16

Family 4

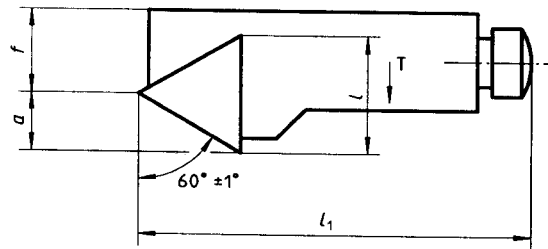


Figure 17

6 General dimensions

See figures 1 and 6 to 17, and tables 3 and 4.

Table 3

Dimensions in millimetres

h_1 $\pm 0,08$	Insert (designation)					f $\begin{smallmatrix} 0 \\ -0,08 \end{smallmatrix}$		l_1		D_{min} (minimum diameter of bore)
	Insert shape									
	T Δ	S $\square$	C $\square$			for cartridge style		for cartridge style		
	F, G, J, S, T, U, W	K, R, S, Y	L	F, G, K, R, S, T, W, Y	J, U	F, G, J, K, L, R, S, U, W, Y	T	F, G, J, K, L, R, T, U, Y	S, W	
6	—	—	CP..04T1.. CP..0502..	CP..04T1.. CP..0502..	CP..04T1.. CP..0502..	8	5,5	25	21	20
8	09	—	06	06	—	10	6	32	28	25
10	11	09	09	—	—	14	9	50	44	40
12	11	09	09	—	—	20	13	55	47	50
	16	12	12							
16	16	12	12	—	—	25	15	63	53	60
	22	15								
20	22	15	12	—	—	25	15	70	60	70
			16							
25	27	19	19	—	—	32	20	100	87	100

Table 4

Dimensions in millimetres

h_1	Dimension a (see figures 8, 9, 11, 12, 13, 15, 17) for cartridge style					
	K, R	S			T, W	Y
		with insert shape T Δ	with insert shape S $\square$	with insert shape C ∇		
C	1,1 ¹⁾	—	—	3,1 ¹⁾	2,2 ¹⁾	0,4 ¹⁾
	1,3 ²⁾	—	—	3,7 ²⁾	2,6 ²⁾	0,4 ²⁾
8	1,6	6,1	—	4,3	4,3 ³⁾ 3 ⁴⁾	0,6
10	2,2	7	6,1	—	5	0,8
12	2,2	7	6,1	—	5	0,8
	3,1	10,2	8,3	—	7,2	1
16	3,1	10,2	8,3	—	7,2	1
	3,8	14,1	10,2	—	10	1,3
20	3,8	14,1	10,2	—	10	1,3
25	4,6	17,2	12,5	—	12,2	1,6

1) For insert CP..04T1..

2) For insert CP..0502..

3) With insert shape T Δ

4) With insert shape C ∇

Annex A

(informative)

Bibliography

- [1] ISO 883:1985, *Indexable hardmetal (carbide) inserts with rounded corners, without fixing hole — Dimensions.*
- [2] ISO 3364:1985, *Indexable hardmetal (carbide) inserts with rounded corners, with cylindrical fixing hole — Dimensions.*
- [3] ISO 5608:1995, *Turning and copying tool holders and cartridges for indexable inserts — Designation.*
- [4] ISO 6987-1:1983, *Indexable hardmetal (carbide) inserts with rounded corners, with partly cylindrical fixing hole — Part 1: Dimensions of inserts with 7 degrees normal clearance.*
- [5] ISO 6987-2:1990, *Indexable inserts for cutting tools — Hardmetal (carbide) inserts with rounded corners, with partly cylindrical fixing hole — Part 2: Dimensions of inserts with 11 degrees normal clearance.*

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 1986* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publication), BIS

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of 'BIS Handbook' and 'Standards: Monthly Additions'.

This Indian Standard has been developed from Doc: No. BP 12 (0035)/PE 12 (0238).

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002
Telephones: 323 01 31, 323 3375, 323 94 02

Telegrams: Manaksanstha
(Common to all offices)

Regional Offices:

Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg
NEW DELHI 110002

Telephone
323 76 17, 323 38 41

Eastern : 1/14 C.I.T. Scheme VII M, V.I.P. Road, Kankurgachi
CALCUTTA 700054

{ 337 84 99, 337 85 61
{ 337 86 26, 337 91 20

Northern : SCO 335-336, Sector 34-A, CHANDIGARH 160022

{ 60 38 43
{ 60 20 25

Southern : C.I.T. Campus, IV Cross Road, CHENNAI 600113

{ 235 02 16, 235 04 42
{ 235 15 19, 235 23 15

Western : Manakalaya, E9 MIDC, Marol, Andheri (East)
MUMBAI 400093

{ 832 92 95, 832 78 58
{ 832 78 91, 832 78 92

Branches : AHMADABAD. BANGALORE. BHOPAL. BHUBANESHWAR.
COIMBATORE. FARIDABAD. GHAZIABAD. GUWAHATI.
HYDERABAD. JAIPUR. KANPUR. LUCKNOW. NAGPUR.
PATNA. PUNE. RAJKOT. THIRUVANANTHAPURAM.